


Please download PDF and fill in the boxes. Use 'Additional Information' for non standard requests. Return form to [sales@thermal-detection.com](mailto:sales@thermal-detection.com) or fax to +44 1642 618307

Name: \_\_\_\_\_ Email: \_\_\_\_\_  
 Organisation: \_\_\_\_\_ Tel: \_\_\_\_\_  
 Country \_\_\_\_\_

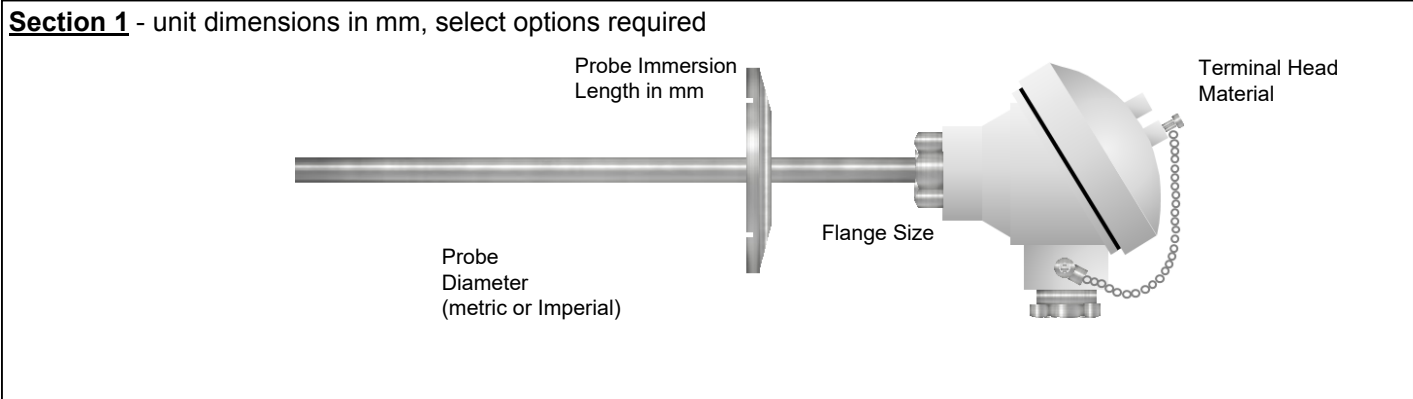

Sensor Number	Thermocouple Only		PT100 Only	
	Hot Junction	Type	Type	Wires
Single	G Grounded	Type 'T'	Class 'A'	2 wire
Duplex	s Insulated		Class 'AA'	3 wire
Triplex			1/10 DIN	4 wire

Section 3 - Reduced Tip	Termination Options	Optional Extras
Reduced Tip Length mm  Reduced Tip Diameter (metric or Imperial)	DIN plate Ceramic Block Transmitter - In Head Transmitter - DIN rail Transmitter Range Min/Max °C	3.1 Material Certs for wetted parts ADIF Statement <0.8RA Surface Finish Electropolishing UKAS Calibration indicate temperature points

**Section 4** - Application Details      Additional information

Number of probes required \_\_\_\_\_

Industry Type \_\_\_\_\_